

**REMOTE POWER MONITORING
COST EFFECTIVE, HIGH SPECIFICATION,
TELEMETRY & SCADA SYSTEM.
MAY 2009**


Unit 7 Charvey Lane Ind. Estate.
Rathnew, Co. Wicklow, Ireland.
Phone: +353 (0)404 64420
Fax: +353 (0) 404 64419
www.ddc.ie

**GSM/GPRS Data Logger
Data email / Multiple Users
SMS Text Messaging & Control
Web Interface / Anywhere Access**



- NO MATTER WHERE YOU ARE IN THE WORLD, LOGGED DATA CAN BE SENT TO YOUR E MAIL. IN ADDITION SMS DATA CAN BE SENT TO YOUR MOBILE PHONE.
- THE LOGGER UNIT IS A GSM / GPRS REMOTE TERMINAL THAT CONTAINS A POWERFUL DATA LOGGER, IT COMMUNICATES DIRECTLY WITH A SMTP SERVER TO E MAIL DATA
- IN ADDITION THE LOGGER PROVIDES 24/7 GLOBAL COMMUNICATION COVERAGE FOR AUTOMATIC SMS ALERTS, SMS I/O INQUIRIES AND SMS I/O SETTINGS
- THE EASY TO USE SOFTWARE PROVIDES A USER FRIENDLY ENVIRONMENT FOR LOGGED DATA MANIPULATION INCLUDING MAIL RETRIEVAL AGENT.
- USES THE POPULAR GSM / GPRS TO TRANSMIT AND RECEIVE DATA, NO NEED FOR EXPENSIVE ANTENNAS, FREQUENCY LICENCES OR POWER CONSUMING RADIO TRANSMITTERS.
- PROVIDES BOTH DATA-TRANSFORMATION AND WEB BASED TELEMETRY SERVICE IN A COST EFFECTIVE PACKAGE FOR GLOBAL USAGE.
- INTERNET SERVER PROVIDES USER-FRIENDLY BROWSER BASED HMI ENVIRONMENT, ELIMINATING THE NEED FOR COSTLY HMI SOFTWARE.

**TYPICAL APPLICATION REMOTE POWER MONITORING
C/W STATUS DISPLAYS & ALARMS**

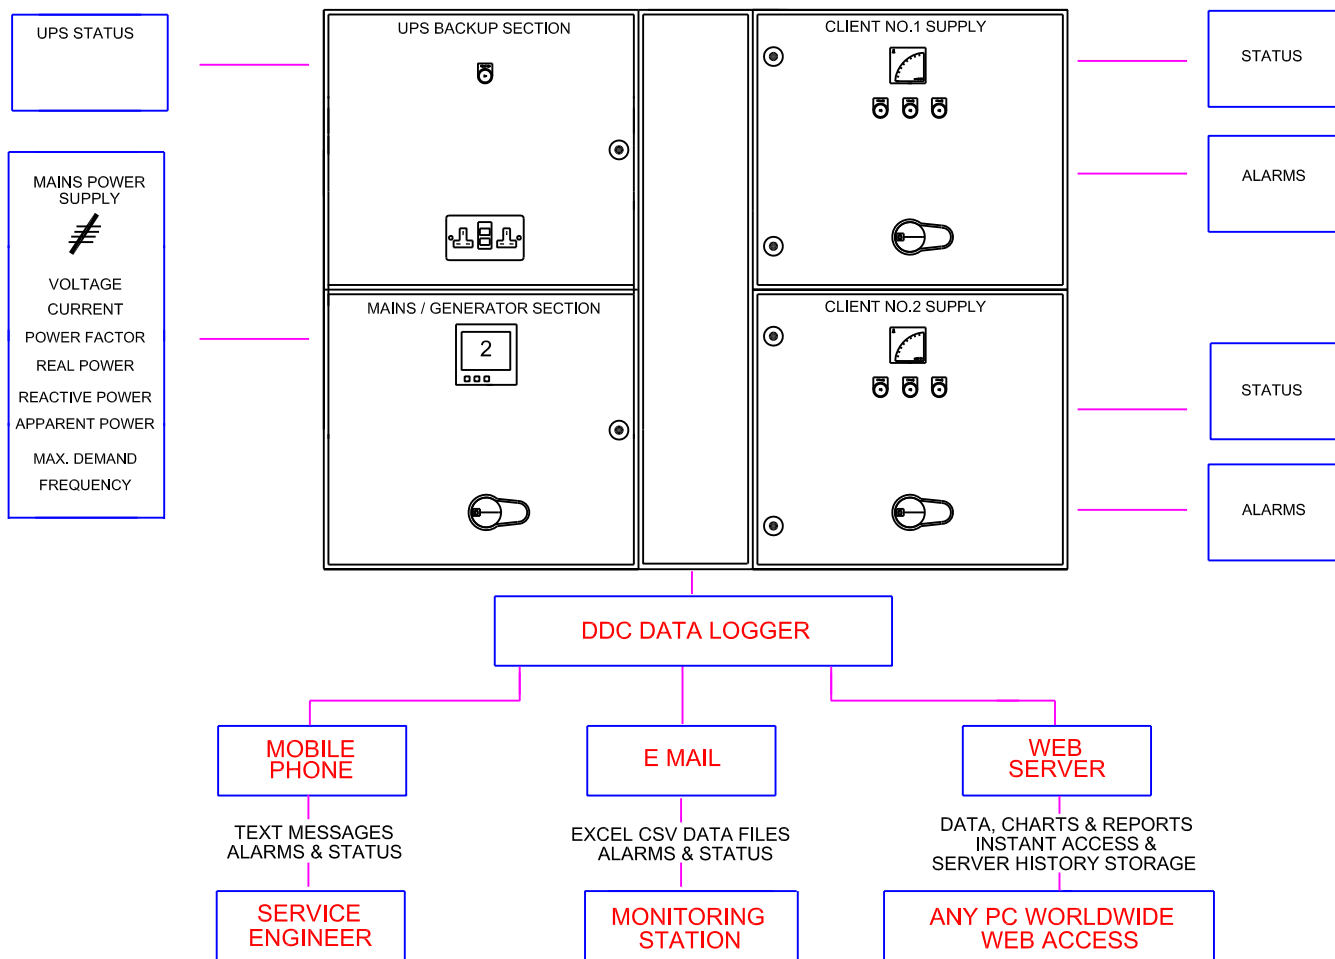

- STANDARD UNIT C/W PANEL ASSEMBLY, MANUFACTURE, TEST, SETUP & PROGRAMMING.
- INCLUDES WEB MONITORING PACKAGE . INITIAL SETUP AND CONFIGURATION.
- 16 DIGITAL INPUT EXPANSION UNIT, INCLUDING MANUFACTURE, SETUP, PROGRAMMING AND TESTING
- 8 ANALOGUE INPUT EXPANSION UNIT, INCLUDING MANUFACTURE, SETUP, PROGRAMMING AND TESTING
- WEB MONITORING PACKAGE, INCLUDING HOSTING, SITE MAINTENANCE, 12 MONTH DATA STORAGE, TECHNICAL BACKUP @ € 20.00 PER MONTH, PAYABLE ANNUALLY IN ADVANCE.
- REPROGRAMMING / MODIFICATIONS TO SYSTEM PARAMETERS / NEW GRAPHS CAN BE PROGRAMMED REMOTELY FROM OUR OFFICES, € 60.00 / HOUR REPROGRAMMING CHARGE.
- SITE INSTALLATION / MATERIALS / ADDITIONAL COMPONENTS REQUIRED TO INTERFACE TO EXISTING EQUIPMENT, QUOTED FOLLOWING SITE INSPECTION.
- INCLUDES 4 X ANALOGUE INPUTS, 8 X DIGITAL INPUTS / 2 X RELAY OUTPUTS.
- SUPPLIED WITH DATA SIM TRANSFERRED TO CUSTOMER AFTER 1 MONTH